


GS Standard series


Characteristics:

Backlash-free connection,small torque for measuring equipment
Small size and small rotation inertia;
Free maintenance and easy for visual Elastomer with different hardness for option;
Finished bore tolerance respects ISO H7,excluding clamping shaft sleeve,DIN6885/1 for bore diameter above $\phi 6$,JS9 for keyway.

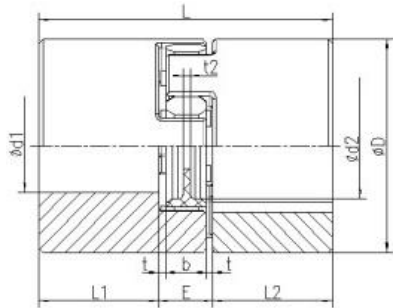

B type

PT-GS(9~38)

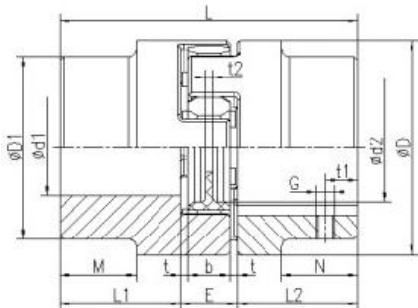

A type

PT-GS(42~90)

PT-GS standard type,Size 5~38 in high-strength aluminum Alloy,Size42~90 in Steel																
型号 Model PT-GS	扭矩 Torque (Nm)			外形尺寸 Dimensions (mm)											定位螺丝标准型结构 Pos tioniry screw Slanderd type	
	92sh-A	98sh-A	64sh-D	d1 (max)	D1	D	d2	L	L1;L2	M;N	E	b	t	t2	G	t1
9	3	5	6	11	-	20	7.2	30	10	-	10	8	-	1.5	M4	5
12	5	9	12	12	-	25	8.5	34	11	-	12	10	-	3.5	M4	5
14	8	13	16	16	-	30	10.5	35	11	-	13	10	1.5	2.0	M4	5
19	10	17	21	24	-	41	18.0	66	25	-	16	12	2	3.0	M5	10
24	35	60	75	28	-	56	27.0	78	30	-	18	14	2	3.0	M5	10
28	95	160	200	38	-	66	30.0	90	35	-	20	15	2.5	4.0	M8	15
38	190	325	405	45	-	80	38.0	114	45	-	24	18	3	4.0	M8	15
42	265	450	560	55	85	95	46.0	126	50	28	26	20	3	4.0	M8	20
48	310	525	655	62	95	105	51.0	140	56	32	28	21	3.5	4.0	M8	20
55	410	685	825	74	110	120	60.0	160	65	37	30	22	4	4.5	M10	20
65	-	940	1175	80	115	135	68.0	185	75	47	35	26	4.5	4.5	M10	20
75	-	1920	2400	95	135	160	80.0	210	85	53	40	30	5	5.0	M10	25
90	-	3600	4500	110	160	200	104.0	245	100	62	45	34	5.5	6.5	M12	30