

PT-GSA

PT-GSA Slotting Type

Characteristics:

Backlash-free connection, small torque for measuring equipment, lifting platform and machining tools, etc..


Small size and small rotation inertia;

Clamped by screws after grooving, which can avoid the gap between shaft bores;

Absorb vibration and compensate radial and axial deviation.

Elastomer with different hardness for option;

Finished bore tolerance respects ISO H7, DIN6885/1 and JS9 for keyway.

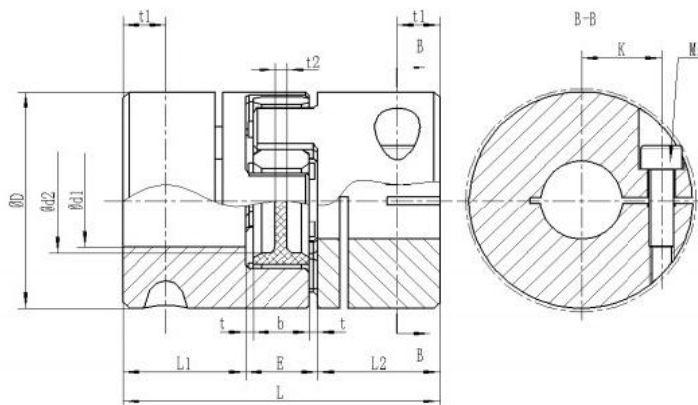

PT-GSA type,Size 19~38 in high-strength aluminum Alloy,Size42~90 in Steel																
型号 Model RGE -GS-KC	扭矩 Torque (Nm)			外形尺寸 Dimensions (mm)											螺钉 Screws	锁紧力矩 Loding terqe NE
	92sh-A	38sh-A	64sh-D	D	mim MAX	d2	L	L1;L2	E	K	b	t	t1	t2	Ms	T
19	10	17	21	41	8~22	18	66	25	16	14.5	12	2	11	3	M6	10.5
24	35	60	75	56	10~28	27	78	30	18	20	14	2	10.5	3	M6	10.5
28	95	160	200	66	14~38	30	90	35	20	25	15	2.5	11.5	4	M8	25
38	190	325	405	80	15~45	38	114	45	24	30	18	3	15.5	4	M8	25
42	265	450	560	95	20~50	46	126	50	26	32	20	3	18	4	M10	69
48	310	525	655	105	25~55	51	140	56	28	36	21	3.5	21	4	M12	120
55	410	685	825	120	32~65	60	160	65	30	42.5	22	4	26	4.5	M12	120
65		940	1175	135	35~70	68	185	75	35	45	26	4.5	33	4.5	M12	120
75		1920	2400	160	42~80	80	210	85	40	51	30	5	36	5	M16	295
90		3600	4500	200	42~90	104	245	100	45	60	34	5.5	40	6.5	M20	580