



ESECUZIONE A

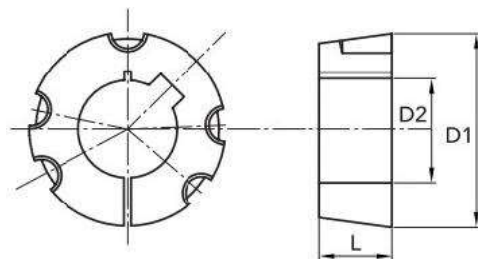


ESECUZIONE B

规格型号	锥孔号	类别	D1	L	D2 (ISO H7)	B(JS9)	T2 prof. cava	N/m	peso Kg
1008-10	1008	A	35	22.3	10	3	1.4	5.6	0.13
1008-11	1008	A	35	22.3	11	4	1.8	5.6	0.13
1008-12	1008	A	35	22.3	12	4	1.8	5.6	0.12
1008-14	1008	A	35	22.3	14	5	2.3	5.6	0.12
1008-15	1008	A	35	22.3	15	5	2.3	5.6	0.11
1008-16	1008	A	35	22.3	16	5	2.3	5.6	0.11
1008-18	1008	A	35	22.3	18	6	2.8	5.6	0.10
1008-19	1008	A	35	22.3	19	6	2.8	5.6	0.10
1008-20	1008	A	35	22.3	20	6	2.8	5.6	0.09
1008-22	1008	A	35	22.3	22	6	2.8	5.6	0.08
1008-24	1008	A	35	22.3	24	8	3.3	5.6	0.07
1008-25	1008	A	35	22.3	25	8	3.3	5.6	0.07
1108-11	1108	A	38	22.3	11	4	1.8	5.6	0.16
1108-12	1108	A	38	22.3	12	4	1.8	5.6	0.15
1108-14	1108	A	38	22.3	14	5	2.3	5.6	0.15
1108-15	1108	A	38	22.3	15	5	2.3	5.6	0.14
1108-16	1108	A	38	22.3	16	5	2.3	5.6	0.14
1108-18	1108	A	38	22.3	18	6	2.8	5.6	0.13
1108-19	1108	A	38	22.3	19	6	2.8	5.6	0.13
1108-20	1108	A	38	22.3	20	6	2.8	5.6	0.12
1108-22	1108	A	38	22.3	22	6	2.8	5.6	0.11
1108-24	1108	A	38	22.3	24	8	3.3	5.6	0.10
1108-25	1108	A	38	22.3	25	8	3.3	5.6	0.09
1108-28	1108	A	38	22.3	28	8	3.3	5.6	0.07
1210-11	1210	A	47	25.4	11	4	1.8	19.6	0.28
1210-12	1210	A	47	25.4	12	4	1.8	19.6	0.28
1210-14	1210	A	47	25.4	14	5	2.3	19.6	0.27
1210-15	1210	A	47	25.4	15	5	2.3	19.6	0.26
1210-16	1210	A	47	25.4	16	5	2.3	19.6	0.26
1210-18	1210	A	47	25.4	18	6	2.8	19.6	0.25
1210-19	1210	A	47	25.4	19	6	2.8	19.6	0.24
1210-20	1210	A	47	25.4	20	6	2.8	19.6	0.24
1210-22	1210	A	47	25.4	22	6	2.8	19.6	0.22
1210-24	1210	A	47	25.4	24	8	3.3	19.6	0.21
1210-25	1210	A	47	25.4	25	8	3.3	19.6	0.21
1210-28	1210	A	47	25.4	28	8	3.3	19.6	0.18
1210-30	1210	A	47	25.4	30	8	3.3	19.6	0.17
1210-32	1210	A	47	25.4	32	10	3.3	19.6	0.15




ESECUZIONE A

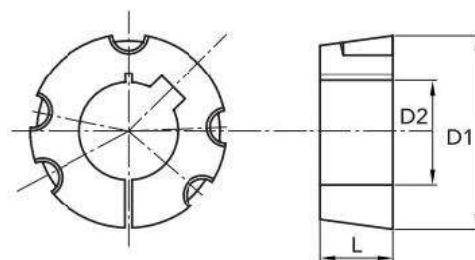


ESECUZIONE B

规格型号	锥孔号	类别	D1	L	D2 (ISO H7)	B(JS9)	T2 prof. cava	N/m	peso Kg
1215-12	1215	A	47	38.1	12	4	1.8	19.6	0.38
1215-14	1215	A	47	38.1	14	5	2.3	19.6	0.38
1215-16	1215	A	47	38.1	16	5	2.3	19.6	0.37
1215-18	1215	A	47	38.1	18	6	2.8	19.6	0.35
1215-19	1215	A	47	38.1	19	6	2.8	19.6	0.34
1215-20	1215	A	47	38.1	20	6	2.8	19.6	0.34
1215-22	1215	A	47	38.1	22	6	2.8	19.6	0.32
1215-24	1215	A	47	38.1	24	8	3.3	19.6	0.29
1215-25	1215	A	47	38.1	25	8	3.3	19.6	0.29
1215-28	1215	A	47	38.1	28	8	3.3	19.6	0.26
1215-30	1215	A	47	38.1	30	8	3.3	19.6	0.23
1215-32	1215	A	47	38.1	32	10	3.3	19.6	0.20
1610-12	1610	A	57	25.4	12	4	1.8	19.6	0.41
1610-14	1610	A	57	25.4	14	5	2.3	19.6	0.41
1610-15	1610	A	57	25.4	15	5	2.3	19.6	0.40
1610-16	1610	A	57	25.4	16	5	2.3	19.6	0.40
1610-18	1610	A	57	25.4	18	6	2.8	19.6	0.39
1610-19	1610	A	57	25.4	19	6	2.8	19.6	0.38
1610-20	1610	A	57	25.4	20	6	2.8	19.6	0.38
1610-22	1610	A	57	25.4	22	6	2.8	19.6	0.36
1610-24	1610	A	57	25.4	24	8	3.3	19.6	0.36
1610-25	1610	A	57	25.4	25	8	3.3	19.6	0.35
1610-28	1610	A	57	25.4	28	8	3.3	19.6	0.32
1610-30	1610	A	57	25.4	30	8	3.3	19.6	0.30
1610-32	1610	A	57	25.4	32	10	3.3	19.6	0.29
1610-35	1610	A	57	25.4	35	10	3.3	19.6	0.26
1610-38	1610	A	57	25.4	38	10	3.3	19.6	0.23
1610-40	1610	A	57	25.4	40	12	3.3	19.6	0.21
1610-42	1610	A	57	25.4	42	12	3.3	19.6	0.19
1615-12	1615	A	57	38.1	12	4	1.8	19.6	0.58
1615-14	1615	A	57	38.1	14	5	2.3	19.6	0.58
1615-16	1615	A	57	38.1	16	5	2.3	19.6	0.58
1615-18	1615	A	57	38.1	18	6	2.8	19.6	0.56
1615-19	1615	A	57	38.1	19	6	2.8	19.6	0.55
1615-20	1615	A	57	38.1	20	6	2.8	19.6	0.55
1615-22	1615	A	57	38.1	22	6	2.8	19.6	0.53
1615-24	1615	A	57	38.1	24	8	3.3	19.6	0.50
1615-25	1615	A	57	38.1	25	8	3.3	19.6	0.49
1615-28	1615	A	57	38.1	28	8	3.3	19.6	0.47
1615-30	1615	A	57	38.1	30	8	3.3	19.6	0.45
1615-32	1615	A	57	38.1	32	10	3.3	19.6	0.41
1615-35	1615	A	57	38.1	35	10	3.3	19.6	0.38
1615-38	1615	A	57	38.1	38	10	3.3	19.6	0.32
1615-40	1615	A	57	38.1	40	12	3.3	19.6	0.29
1615-42	1615	A	57	38.1	42	12	3.3	19.6	0.29




ESECUZIONE A

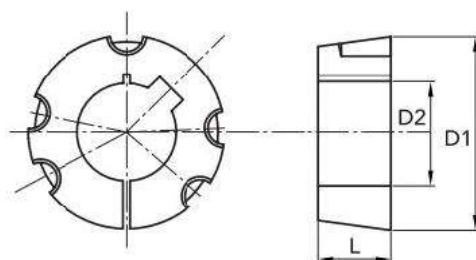


ESECUZIONE B

规格型号	锥孔号	类别	D1	L	D2 (ISO H7)	B(JS9)	T2 prof. cava	N/m	peso Kg
2012-15	2012	A	70	31.8	15	5	2.3	30.4	0.78
2012-16	2012	A	70	31.8	16	5	2.3	30.4	0.76
2012-18	2012	A	70	31.8	18	6	2.8	30.4	0.76
2012-19	2012	A	70	31.8	19	6	2.8	30.4	0.76
2012-20	2012	A	70	31.8	20	6	2.8	30.4	0.75
2012-22	2012	A	70	31.8	22	6	2.8	30.4	0.74
2012-24	2012	A	70	31.8	24	8	3.3	30.4	0.72
2012-25	2012	A	70	31.8	25	8	3.3	30.4	0.71
2012-28	2012	A	70	31.8	28	8	3.3	30.4	0.68
2012-30	2012	A	70	31.8	30	8	3.3	30.4	0.66
2012-32	2012	A	70	31.8	32	10	3.3	30.4	0.64
2012-35	2012	A	70	31.8	35	10	3.3	30.4	0.60
2012-38	2012	A	70	31.8	38	10	3.3	30.4	0.57
2012-40	2012	A	70	31.8	40	12	3.3	30.4	0.54
2012-42	2012	A	70	31.8	42	12	3.3	30.4	0.51
2012-45	2012	A	70	31.8	45	14	3.8	30.4	0.46
2012-48	2012	A	70	31.8	48	14	3.8	30.4	0.40
2012-50	2012	A	70	31.8	50	14	3.8	30.4	0.37
2517-15	2517	A	86	44.5	15	5	2.3	48.0	1.62
2517-18	2517	A	86	44.5	18	6	2.8	48.0	1.62
2517-19	2517	A	86	44.5	19	6	2.8	48.0	1.62
2517-20	2517	A	86	44.5	20	6	2.8	48.0	1.60
2517-22	2517	A	86	44.5	22	6	2.8	48.0	1.57
2517-24	2517	A	86	44.5	24	8	3.3	48.0	1.57
2517-25	2517	A	86	44.5	25	8	3.3	48.0	1.56
2517-28	2517	A	86	44.5	28	8	3.3	48.0	1.52
2517-30	2517	A	86	44.5	30	8	3.3	48.0	1.49
2517-32	2517	A	86	44.5	32	10	3.3	48.0	1.45
2517-33	2517	A	86	44.5	33	10	3.3	48.0	1.40
2517-35	2517	A	86	44.5	35	10	3.3	48.0	1.40
2517-38	2517	A	86	44.5	38	10	3.3	48.0	1.40
2517-40	2517	A	86	44.5	40	12	3.3	48.0	1.35
2517-42	2517	A	86	44.5	42	12	3.3	48.0	1.27
2517-45	2517	A	86	44.5	45	14	3.8	48.0	1.20
2517-48	2517	A	86	44.5	48	14	3.8	48.0	1.13
2517-50	2517	A	86	44.5	50	14	3.8	48.0	1.08
2517-55	2517	A	86	44.5	55	16	4.3	48.0	0.96
2517-60	2517	A	86	44.5	60	18	4.4	48.0	0.81
2517-65	2517	A	86	44.5	65	18	4.4	48.0	0.65




ESECUZIONE A

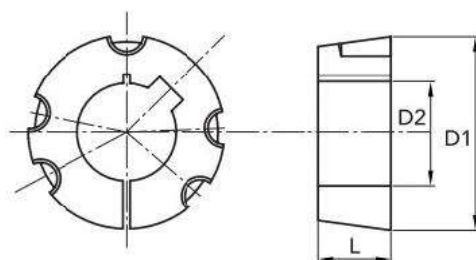


ESECUZIONE B

规格型号	锥孔号	类别	D1	L	D2 (ISO H7)	B(JS9)	T2 prof. cava	N/m	peso Kg
3020-20	3020	A	108	50.8	20	6	2.8	90.0	2.91
3020-25	3020	A	108	50.8	25	8	3.3	90.0	2.79
3020-28	3020	A	108	50.8	28	8	3.3	90.0	2.79
3020-30	3020	A	108	50.8	30	8	3.3	90.0	2.84
3020-32	3020	A	108	50.8	32	10	3.3	90.0	2.84
3020-35	3020	A	108	50.8	35	10	3.3	90.0	2.75
3020-38	3020	A	108	50.8	38	10	3.3	90.0	2.67
3020-40	3020	A	108	50.8	40	12	3.3	90.0	2.64
3020-42	3020	A	108	50.8	42	12	3.3	90.0	2.59
3020-45	3020	A	108	50.8	45	14	3.8	90.0	2.52
3020-48	3020	A	108	50.8	48	14	3.8	90.0	2.43
3020-50	3020	A	108	50.8	50	14	3.8	90.0	2.37
3020-55	3020	A	108	50.8	55	16	4.3	90.0	2.23
3020-60	3020	A	108	50.8	60	18	4.4	90.0	2.07
3020-65	3020	A	108	50.8	65	18	4.4	90.0	1.89
3020-70	3020	A	108	50.8	70	20	4.9	90.0	1.69
3020-75	3020	A	108	50.8	75	20	4.9	90.0	1.49
3030-30	3030	A	108	76.2	30	8	3.3	90.0	3.95
3030-35	3030	A	108	76.2	35	10	3.3	90.0	3.95
3030-38	3030	A	108	76.2	38	10	3.3	90.0	3.86
3030-40	3030	A	108	76.2	40	12	3.3	90.0	3.82
3030-42	3030	A	108	76.2	42	12	3.3	90.0	3.69
3030-45	3030	A	108	76.2	45	14	3.8	90.0	3.55
3030-48	3030	A	108	76.2	48	14	3.8	90.0	3.45
3030-50	3030	A	108	76.2	50	14	3.8	90.0	3.42
3030-55	3030	A	108	76.2	55	16	4.3	90.0	3.18
3030-60	3030	A	108	76.2	60	18	4.4	90.0	2.95
3030-65	3030	A	108	76.2	65	18	4.4	90.0	2.68
3030-70	3030	A	108	76.2	70	20	4.9	90.0	2.38
3030-75	3030	A	108	76.2	75	20	4.9	90.0	2.03




ESECUZIONE A

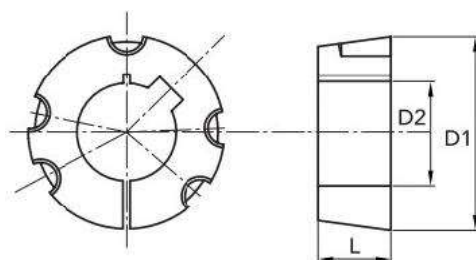


ESECUZIONE B

规格型号	锥孔号	类别	D1	L	D2 (ISO H7)	B(JS9)	T2 prof.	N/m	peso Kg
3525-30	3525	B	127	64.9	30	8	3.3	113.0	5.10
3525-35	3525	B	127	64.9	45	10	3.3	113.0	4.91
3525-38	3525	B	127	64.9	38	10	3.3	113.0	4.85
3525-40	3525	B	127	64.9	40	12	3.3	113.0	4.80
3525-42	3525	B	127	64.9	42	12	3.3	113.0	4.71
3525-45	3525	B	127	64.9	45	14	3.8	113.0	4.67
3525-48	3525	B	127	64.9	48	14	3.8	113.0	4.55
3525-50	3525	B	127	64.9	50	14	3.8	113.0	4.44
3525-55	3525	B	127	64.9	55	16	4.3	113.0	4.29
3525-60	3525	B	127	64.9	60	18	4.4	113.0	4.05
3525-65	3525	B	127	64.9	65	18	4.4	113.0	3.88
3525-70	3525	B	127	64.9	70	20	4.9	113.0	3.58
3525-75	3525	B	127	64.9	75	20	4.9	113.0	3.37
3525-80	3525	B	127	64.9	80	22	4.9	113.0	3.05
3525-85	3525	B	127	64.9	85	22	5.4	113.0	3.05
3525-90	3525	B	127	64.9	90	25	5.4	113.0	3.05
3535-30	3535	B	127	88.9	30	8	3.3	113.0	6.90
3535-35	3535	B	127	88.9	35	10	3.3	113.0	6.70
3535-38	3535	B	127	88.9	38	10	3.3	113.0	6.53
3535-40	3535	B	127	88.9	40	12	3.3	113.0	6.40
3535-42	3535	B	127	88.9	42	12	3.3	113.0	6.40
3535-45	3535	B	127	88.9	45	14	3.8	113.0	6.25
3535-48	3535	B	127	88.9	48	14	3.8	113.0	6.17
3535-50	3535	B	127	88.9	50	14	3.8	113.0	6.05
3535-55	3535	B	127	88.9	55	16	4.3	113.0	5.81
3535-60	3535	B	127	88.9	60	18	4.4	113.0	5.50
3535-65	3535	B	127	88.9	65	18	4.4	113.0	5.20
3535-70	3535	B	127	88.9	70	20	4.9	113.0	4.88
3535-75	3535	B	127	88.9	75	20	4.9	113.0	4.44
3535-80	3535	B	127	88.9	80	22	5.4	113.0	4.08
3535-85	3535	B	127	88.9	85	22	5.4	113.0	3.67
3535-90	3535	B	127	88.9	90	25	5.4	113.0	3.21




ESECUZIONE A

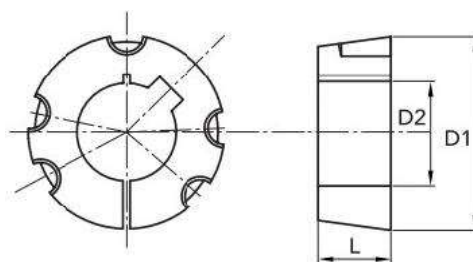


ESECUZIONE B

规格型号	锥孔号	类别	D1	L	D2 (ISO H7)	B(JS9)	T2 prof. cava	N/m	peso Kg
4030-30	4030	B	146	76.0	30	8	3.3	169.0	6.65
4030-40	4030	B	146	76.0	40	12	3.3	169.0	6.65
4030-42	4030	B	146	76.0	42	12	3.3	169.0	6.65
4030-45	4030	B	146	76.0	45	14	3.8	169.0	6.58
4030-48	4030	B	146	76.0	48	14	3.8	169.0	6.55
4030-50	4030	B	146	76.0	50	14	3.8	169.0	6.40
4030-55	4030	B	146	76.0	55	16	4.3	169.0	6.40
4030-60	4030	B	146	76.0	60	18	4.4	169.0	6.35
4030-65	4030	B	146	76.0	65	18	4.4	169.0	6.35
4030-70	4030	B	146	76.0	70	20	4.9	169.0	6.30
4030-75	4030	B	146	76.0	75	20	4.9	169.0	6.30
4030-80	4030	B	146	76.0	80	22	5.4	169.0	6.10
4030-85	4030	B	146	76.0	85	22	5.4	169.0	6.10
4030-90	4030	B	146	76.0	90	25	5.4	169.0	5.90
4040-35	4040	B	146	101.8	35	10	3.3	169.0	10.16
4040-45	4040	B	146	101.8	45	14	3.8	169.0	9.86
4040-48	4040	B	146	101.8	48	14	3.8	169.0	9.66
4040-50	4040	B	146	101.8	50	14	3.8	169.0	9.48
4040-55	4040	B	146	101.8	55	16	4.3	169.0	9.27
4040-60	4040	B	146	101.8	60	18	4.4	169.0	8.93
4040-65	4040	B	146	101.8	65	18	4.4	169.0	8.65
4040-70	4040	B	146	101.8	70	20	4.9	169.0	8.17
4040-75	4040	B	146	101.8	75	20	4.9	169.0	7.78
4040-80	4040	B	146	101.8	80	22	5.4	169.0	7.35
4040-85	4040	B	146	101.8	85	22	5.4	169.0	6.89
4040-90	4040	B	146	101.8	90	25	5.4	169.0	6.36
4040-95	4040	B	146	101.8	95	25	5.4	169.0	5.94
4040-100	4040	B	146	101.8	100	28	6.4	169.0	5.27
4535-35	4535	B	162	89.0	35	10	3.3	192.0	10.70
4535-65	4535	B	162	89.0	65	18	4.4	192.0	10.50
4535-70	4535	B	162	89.0	70	20	4.9	192.0	10.20
4535-75	4535	B	162	89.0	75	20	4.9	192.0	9.95
4535-80	4535	B	162	89.0	80	22	5.4	192.0	9.95
4535-85	4535	B	162	89.0	85	22	5.4	192.0	9.90
4535-90	4535	B	162	89.0	90	25	5.4	192.0	9.80
4535-95	4535	B	162	89.0	95	25	5.4	192.0	9.75
4535-100	4535	B	162	89.0	100	28	6.4	192.0	9.65
4535-110	4535	B	162	89.0	110	28	6.4	192.0	9.55
4535-120	4535	B	162	89.0	120	32	7.4	192.0	9.45



ESECUZIONE A

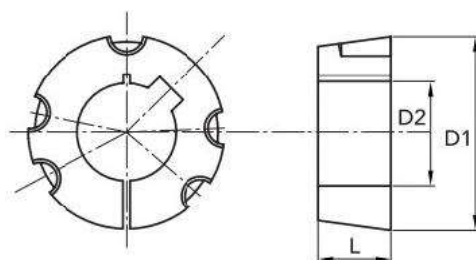

ESECUZIONE B

规格型号	锥孔号	类别	D1	L	D2 (ISO H7)	B(JS9)	T2 prof. cava	N/m	peso Kg
4545-35	4545	B	162	114.3	35	10	3.3	192.0	13.80
4545-55	4545	B	162	114.3	55	16	4.3	192.0	13.15
4545-60	4545	B	162	114.3	60	18	4.4	192.0	12.76
4545-65	4545	B	162	114.3	65	18	4.4	192.0	12.38
4545-70	4545	B	162	114.3	70	20	4.9	192.0	12.02
4545-75	4545	B	162	114.3	75	20	4.9	192.0	11.57
4545-80	4545	B	162	114.3	80	22	5.4	192.0	11.05
4545-85	4545	B	162	114.3	85	22	5.4	192.0	10.46
4545-90	4545	B	162	114.3	90	25	5.4	192.0	9.99
4545-95	4545	B	162	114.3	95	25	5.4	192.0	9.42
4545-100	4545	B	162	114.3	100	28	6.4	192.0	8.63
4545-110	4545	B	162	114.3	110	28	6.4	192.0	7.37
5040-50	5040	B	178	101.6	50	14	3.8	272.0	12.20
5040-70	5040	B	178	101.6	70	20	4.9	272.0	11.90
5040-75	5040	B	178	101.6	75	20	4.9	272.0	11.90
5040-80	5040	B	178	101.6	80	22	5.4	272.0	11.30
5040-85	5040	B	178	101.6	85	22	5.4	272.0	11.30
5040-90	5040	B	178	101.6	90	25	5.4	272.0	10.60
5040-100	5040	B	178	101.6	100	28	6.4	272.0	10.60
5040-110	5040	B	178	101.6	110	28	6.4	272.0	10.00
5040-120	5040	B	178	101.6	120	32	7.4	272.0	9.70
5040-125	5040	B	178	101.6	125	32	7.4	272.0	9.70
5050-50	5050	B	178	127.0	50	14	3.8	272.0	16.70
5050-65	5050	B	178	127.0	65	18	4.4	272.0	16.70
5050-70	5050	B	178	127.0	70	20	4.9	272.0	16.70
5050-75	5050	B	178	127.0	75	20	4.9	272.0	16.05
5050-80	5050	B	178	127.0	80	22	5.4	272.0	15.56
5050-85	5050	B	178	127.0	85	22	5.4	272.0	15.00
5050-90	5050	B	178	127.0	90	25	5.4	272.0	14.43
5050-95	5050	B	178	127.0	95	25	5.4	272.0	13.88
5050-100	5050	B	178	127.0	100	28	6.4	272.0	13.05
5050-110	5050	B	178	127.0	110	28	6.4	272.0	11.56
5050-115	5050	B	178	127.0	115	32	7.4	272.0	15.17
5050-120	5050	B	178	127.0	120	32	7.4	272.0	9.78
5050-125	5050	B	178	127.0	125	32	7.4	272.0	9.05